


EL25 DRO

Compact and cost-effective solution for precise measurement



- ☞ Ergonomic and compact design with panel mounting option
- ☞ Basic functions such as Circle and Distance measurement
- ☞ Interfaces standard Optical and magnetic RS422 digital encoders
- ☞ RS232 communication for serial printer, Result backup and service port for software update
- ☞ Linear error compensation for linear axes available
- ☞ Backup memory for 50 results
- ☞ CE and RoHS approved
- ☞ Manufactured to ISO 9001:2015 standard



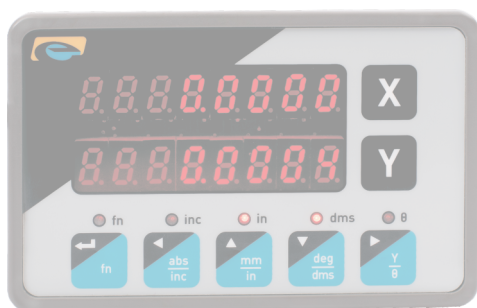







DRO EL25



Measurement Functions

-  Axis set / reset
-  Absolute / incremental counting mode
-  Inch / mm mode
-  DD.DEC / DD.MM.SS mode for θ axis
-  Circle measurement
-  Distance measurement

Specifications

Power Supply	External AC-DC adapter, I/P - 100 VAC to 240VAC O/P - 5VDC, 3A
Display	7 segment 0.31" size display 2 axis display with θ axis display switchable with Y axis
Resolutions	User selectable 0.1 μ m, 0.2 μ m, 0.5 μ m, 1 μ m, 2 μ m, 5 μ m, 10 μ m, 20 μ m, 50 μ m (Relative to transducer scale input)
Encoder Input	3 axes X, Y, θ , Digital RS422 encoder
Keyboard	Tactile keyboard
Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to 70°C
Relative Humidity	20% to 80% Non-condensing
Net Weight	Approx. 300 gram
Dimensions	96mm (Length) X 59mm (Width) X 42mm (Depth)
Power Consumption	8 watt max.
Panel cutout dimensions	96.5mm X 59.5mm
Encoder consumption	150 mA (each axis)



Electronica Mechatronic Systems (I) Pvt. Ltd.

Unit No. 37 & 44, Electronic Co-op. Estate, Pune-Satara Road,

Pune 411009 India

Tel.: +91-20-2422 4440, 2422 2293

Email: enquiry@electronicaems.com

website: www.electronicaems.com

Owning to continuous product Research & Development, design specifications are liable to change.

Dealer Stamp

Version: EL2512042017
Code: 0073-50-0280